



BLUETTI 200W

Portable Solar Panel

SP Series 200W | 23.4%

Fold It. Carry It.
Charge It.

200W	23.4%	IP67	ETFE	MC4	17.2 lb
Maximum Power	Cell Efficiency	Water Resistant	Laminated Surface	Standard Connector	Folds Flat to Carry

Overview

Maximize Solar Energy

200W at up to 23.4% conversion, enough to keep a station topped up off grid or in an outage.

Easy Mobility, Easy Power

At 17.2 lbs it folds to the size of a slim case, light enough to set up on your own.

Built to Take Weather

An ETFE coating over monocrystalline cells, rated IP67, holds up outdoors and wipes clean.

Specifications

POWER

Maximum Power	200W
Cell Type	Monocrystalline
Cell Efficiency	Up to 23.4%
Cell Lamination	ETFE
Open Circuit Voltage (OCV)	24.6V
Short Circuit Current (Isc)	10.8A
Water Resistance	IP67


GENERAL

Model	SP200L
Connector	Standard MC4
Weight	17.15 lbs (8.14 kg)
Dimensions (Unfolded)	23.9 × 82.8 in
Dimensions (Folded)	23 × 23.9 × 1.7 in
Operating Temperature	-13 to 149°F
Warranty	12 Months

Universal Compatibility

The universal MC4 connector pairs with most BLUETTI stations, including the **Apex 300, Elite 100 V2, Elite 200 V2, Elite 300, Elite 400, Premium 200 V2, AC70, AC180, AC200L, AC500, and EB3A.**

Run more than one panel for a faster charge, staying inside your station's voltage and current limits. **Do not mix panel models.**

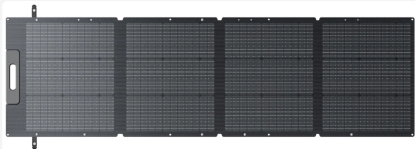

Folds flat to 23 × 23.9 × 1.7 in

Also Available · Solar Charging Cable (20A MC4 to XT60)

Connects the panel's MC4 leads to the XT60 solar input on the **Apex 300, Elite 100 V2, Elite 200 V2, Elite 300, and Elite 400.** Sold separately at our SALT showroom.

Rated 200W is an optimal test result at a set temperature and light level. Real output varies with orientation, shading, dirt, and panel temperature. Not for roof mounting. IP67 protects against splashing. Do not leave the panel in rain or water.

RevoluSun · SALT at Our Kaka'ako · revolusun.com/bluetti · **cleaner. smarter. solar.**

